


no contact ACA, DCA current measurement, True RMS

AC/DC FORK CURRENT TESTER

Model : FT-9950

ISO-9001, CE, IEC1010

www.yalab.com.tw 02-2389-0101

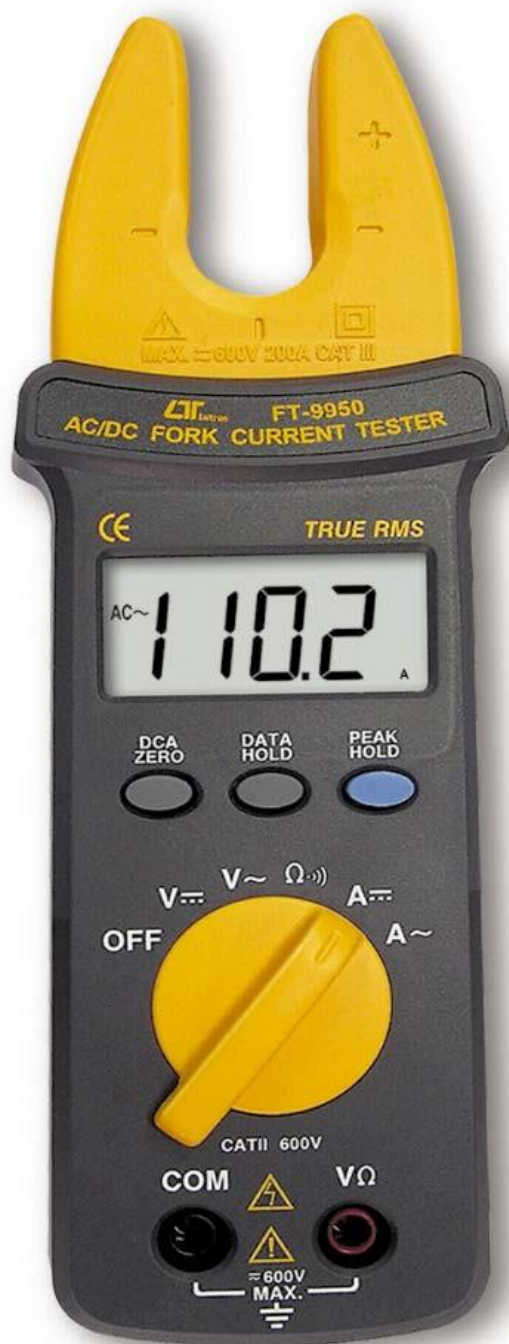

FEATURES

- * Heavy duty, CATIII-600V.
- * Fork current probe both for ACA and DCA.
- * ACA (200 A x 0.1 A),
DCA (200 A x 0.1 A).
- * DCV, ACV, ohms, Continuity beeper.
- * True RMS.
- * Data hold, Peak hold, DCA zero.
- * Hall effect sensor for no contact current measurement.
- * DC 9V battery (006P).



Lutron

www.YaLAB.com.tw

The Art of Measurement

2,000 counts, 200 Amp ACA/DCA, 600 V ACV/DCV,
True RMS, OHMS, Continuity, Hold, Peak Hold

FORK CURRENT TESTER


Model : FT-9950

FEATURES

* Use the fork current sensing structure, when make current measurement it not necessary to open the jaws as the traditional clamp meter, easy operation.
* 200 Amp ACA, DCA for fork current measurement
* Design meet IEC 1010 CATIII 600V safety requirement.
* 2000 counts, multi-functions.
* Measurement for ACA, DCA, ACV, DCV, Ohms, Continuity beeper.
* True RMS measuring reading for ACV and ACA function.
* Data hold.
* Peak hold.
* Overload protection circuit is provided for all range.
* LSI circuit provides high reliability and durability.
* Pocket & slim housing case, easy carryout.
* Compact & heavy duty ABS housing fireproof plastic case.


Weight	205 g/0.45 LB (including battery).
Max. Fork Jaw	15 mm (0.59 inch) Dia.
Open Size	
Accessories	Operation manual..... 1 PC.
Included	Test lead (red & black)..... 1 PC.
Optional	Carrying case, CA-52A
Accessories	

ELECTRICAL SPECIFICATIONS (23± 5 °C)

Function	Range	Reso- lution	Accuracy	Overload Protection
DCV	600 V	1 V	DCV : ± (0.8 % + 1d)	AC/DC 600V
ACV (true rms)			ACV : ± (1 % + 2d)	
DCA	200 A	0.1 A	DCA ± (2 % + 5d)	
ACA (true rms)	ACA : 0.5 to 200A		ACA ± (2 % + 8d)	
Remark	<ul style="list-style-type: none"> * True RMS measuring reading for ACV and ACA function. * Input impedance for ACV & DCV range is 9 Meg ohm. * ACA, ACV frequency response is from 40 to 1 KHz. * ACA, ACV specification be tested on sine wave 50/60 Hz. 			

GENERAL SPECIFICATIONS

Display	12.2 mm (0.48") LCD, 3 1/2 digits, Max. indication 1999.
Measurement Range	ACA, DCA, ACV, DCV, Ohms, Continuity beeper.
Polarity	Automatic Switching, " - " indicates negative polarity.
Current Sensor	Hall effect sensor.
Zero adjustment	DCA : Push bottom adjustment. Other ranges : Automatic adjustment.
Over-input	Indication of " OL ".
Sampling Time	Approx. 0.35 second.
Battery	006P DC 9V battery.
Operating Temperature	0 to 50 °C (32 to 122 °F).
Operating Humidity	Less than 80% RH.
Dimension	HWD : 176 x 60 x 41 mm (6.9 x 2.4 x 1.6 inch)

Function	Range	Reso- lution	Accuracy	Overload Protection
Ohms	200 ohm	0.1 ohm	± (1 % + 2d)	 AC/DC 400V
Continuity	If measuring resistance is less than 10 ohm, the beeper will sound .			
Peak Hold	Acquisition Time: Approx. 800 ms. Application: Use for measuring transient signal for current.			

* Appearance and specifications listed in this brochure are subject to change without notice.

0601-FT9950

www.YaLAB.com.tw 02-2389-0101