


# LAN CABLE TESTER

Model : LAN-922

ISO-9001, CE, IEC1010

[www.YaLAB.com.tw](http://www.YaLAB.com.tw) 02-2389 0101

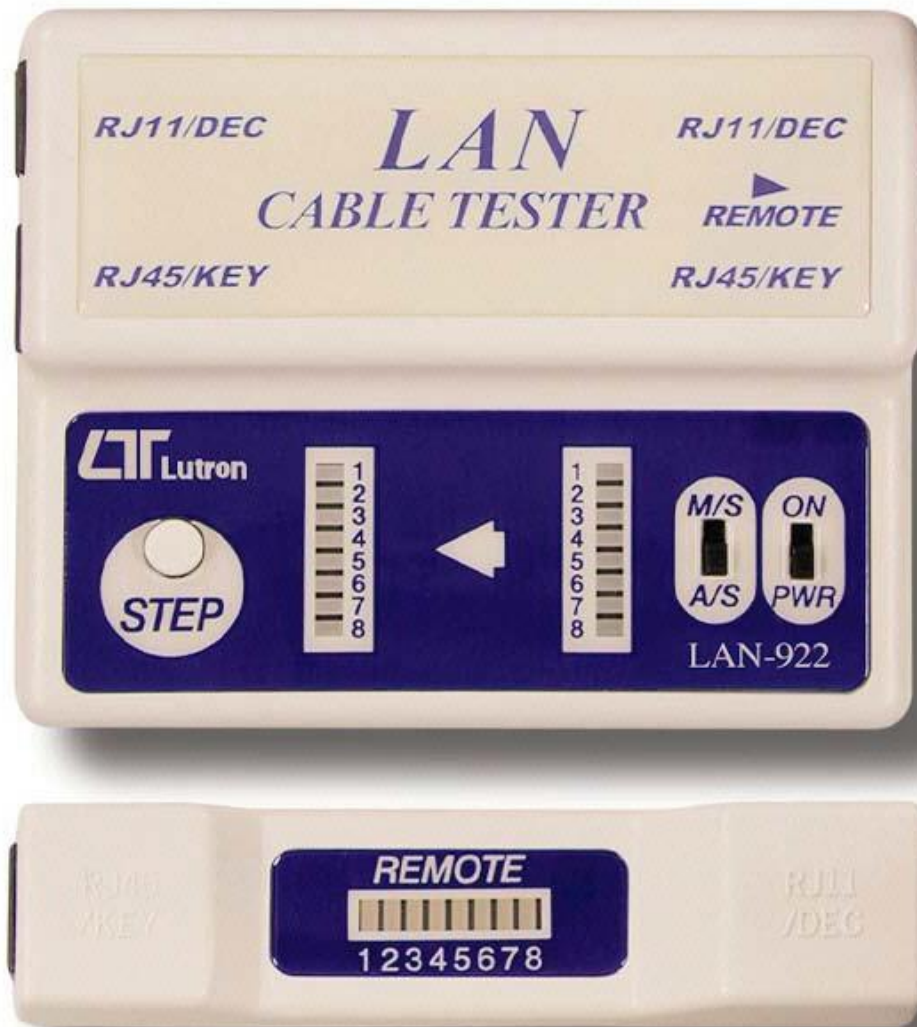

**Lutron**

*The Art of Measurement*

[www.YaLAB.com.tw](http://www.YaLAB.com.tw)

# LAN CABLE TESTER

**Model : LAN-922**

## SPECIFICATIONS

Main unit	
Display	8 pairs LEDs for the monitors wires.
Connector	RJ-45/KEY x 2, RJ-11/DEC x 2. ( 30 micro gold plating )
Power	DC 9V battery, Alkaline type, 006P, MN1604 ( PP3) or equivalent.
Dimensions	101 x 81 x 25 mm.
Weight	125 g.
Housing	High impact ABS plastic.
Interface	Ethernet 10 BASE-T, EIA/TIA-568A, EIA/TIA-568B, AT&T 258A, TOKEN RING, USOC8/6/4, DEC JMM.

## Remote unit

Display	8 pairs LEDs for the monitors wires.
Connector	RJ-45/KEY x 1, RJ-11/DEC x 1. ( 30 micro gold plating )
Power	None
Dimensions	101 x 25 x 25 mm.
Weight	25 g.
Housing	High impact ABS plastic.

## OPERATION PROCEDURES

Test for RJ-45, RJ-11, DEC/JMM, USOC 4/6/8, even BNC/TNC connectors.

- 1) Plug one end of cable in to right jack and other end into left jack ( or the remote unit ).
- 2) Select " A/S : ( Auto scanning ) or " M/S " ( Manual scanning ) scanning function.
- 3) If you choose the " M/S " scanning functions, then each LED will be lit as you push the " STEP " button.
- 4) If the cable is OK, the corresponding LED will be lit, if not the cable is bad or shot.

\* Appearance and specifications listed in this brochure are subject to change without notice.

0107-LAN922

[www.YaLAB.com.tw](http://www.YaLAB.com.tw) 02-2389-0101